

HOME COMPLETE

SKU: 650145 MSRP: \$1469.99

FEATURES

- Boosts all available networks speeds for enhanced cell signal coverage
- Offers an ideal solution for large homes up to 7,500 sq. ft.
- Supports multiple cellular devices and users simultaneously
- Works on all major Canadian carriers




- LTE** FASTEST NETWORK SPEEDS
- UP TO 7,500 sq. ft. COVERAGE
- UP TO +72 dB GAIN
- MULTI-USER WIRELESS BOOSTER

ABOUT

The weBoost **Home Complete** cell signal booster offers best-in-class performance in its price range. The Home Complete offers homeowners the ability to enhance networks speeds across all carriers throughout a large, multi-level home—up to 7,500 sq. ft. With the addition of Band 25, it also provides enhanced support for additional carriers across Canada. The Home Complete’s booster and inside antenna are designed to complement contemporary décor. For ease of installation and versatility, the wall-mount brackets for the booster and inside antenna can be secured with the included 3M® Command™ strips or using screws (not included). The inside antenna also features a built-in kickstand for optional shelf placement. With donor and server ports on the top of the booster unit, the Home Complete helps prioritize cable access and organization. Users will experience faster data speeds, better voice quality, fewer dropped calls, and superior streaming capability. Like all weBoost boosters, it works on all major Canadian carriers. Comes with installation guide, 2-year manufacturer’s warranty, and 30-day money-back guarantee.

KIT INCLUDES

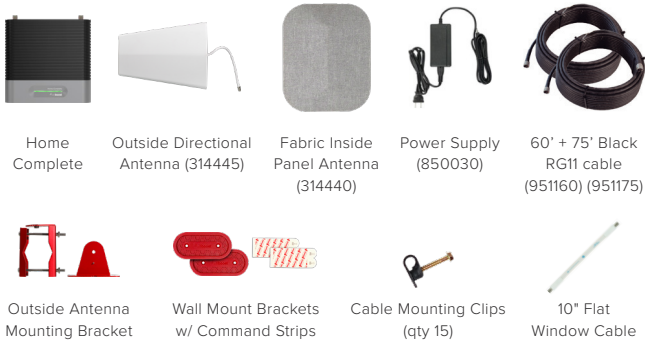

SPECIFICATIONS

MODEL NUMBER	460060	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	72 dB	
IMPEDANCE	75 Ohm	
POWER	110-240V AC, 50-60 Hz, 20 W	
CONNECTORS	F-Female	
BOOSTER DIMENSIONS	8.25 x 6 x 2.4 in	
BOOSTER WEIGHT	1.55 lbs	

COVERAGE AREA

IF YOUR OUTSIDE SIGNAL IS	YOUR BOOSTED SIGNAL MAY BE
●●●●● -89 AND LOWER About 5 bars	UP TO 7,500 sq. ft.
●●●●● -90 dB About 3 to 4 bars	UP TO 4,000 sq. ft.
●●●●● -100 dB About 1 to 2 bars	UP TO 2,000 sq. ft.
○○○○○ No existing	A signal booster likely will not work

HOW IT WORKS



- 01 **Outside antenna:** The outside antenna communicates back and forth with nearby cell towers.
- 02 **Booster:** The booster amplifies any cell signals it receives from the outside antenna.
- 03 **Inside antenna:** The inside antenna broadcasts these signals.

AVAILABLE ACCESSORIES

Optional Antenna Kits



Inside Panel Antenna
with mount
(314444)



Outside Directional
Antenna with mount
(314445)



75' RG-11 Extension
Cable with F Male
Connectors
(951175)




Splitters 75 Ohm
(850034, 850035,
850036)




Lightning Surge
Protector 75 Ohm
(859992)

PACKAGE DIMENSIONS


17.75 L x 12.25 W x 12.25 H



FRONT



SIDE



TOP/BOTTOM



WEIGHT

MASTER CARTON: 25 L x 20 W x 15 H | 36.60 Lbs. | Qty 2

SUPPORT



2-Year Warranty from Purchase.

Website: www.weboost.ca/support

Phone: +1 866 294 1660

Monday to Friday



Innovation, Science and
Economic Development Canada



**PROUDLY DESIGNED AND BUILT
IN ST. GEORGE, UTAH
U.S.A**

UPC

650145



650145_Home-Complete_SS_CA_081326

FOR PARTNER'S USE