

Enterprise 4330 Mobile

SKU: 469075


FEATURES

- Enterprise 4330 amplifier
- Tripod-mounted outside and inside antennas
- 75'- and 60'-lengths of Wilson400 antenna cable
- Pelican™ case with custom protective foam liner
- Works with all phones and devices on all carriers

* **WARNING:** Cancer and Reproductive Harm - www.P65Warnings.ca.gov.




Kit Includes



Enterprise 4330
Amplifier & Power Cord



Inside Panel
Antenna



Outside
Directional
Antenna



75' & 60' Wilson
400 Cable



2 Tripod
Stands



25' Power
Extension
Cord



L-Bracket &
Hardware

About

The **Enterprise 4330 Mobile Kit** comes with everything needed to provide on-site demonstrations of Wilson Connectivity's latest in-building cell signal amplification technology for prospective customers.


Designed for easy setup and quick takedown, the Mobile Kit allows support for a short term mobile deployment of the Enterprise 4330 amplify system within 30 minutes or less. To help support improved cellular coverage in construction and remote areas where communication is key to ensure smooth operation. The mobile kit can leverage our RF signal meter for taking "before and after" readings during the on-site installation. The featured tripods allow for optimal mounting and positioning of the outside and inside antennas—all without the need to drill holes in walls.

For added convenience, the entire Mobile Kit fits securely inside a protective Pelican™ case. The kit also includes a 3-year manufacturer's warranty and a 30-day money-back guarantee

Specifications

MODEL NUMBER	461075	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25	1900 MHz
MAX GAIN	70 dB	
MAX UPLINK POWER	26 dBm	
MAX DOWNLINK POWER	4x17 dBm	
IMPEDANCE	50 Ohm	
POWER	110 - 240 V AC, 50 - 60 Hz, 30W	
CONNECTORS	N-Female	
AMPLIFIER DIMENSIONS	3.50 x 18.89 x 14.04 in.	
AMPLIFIER WEIGHT	18.0 lbs	

Setup Overview

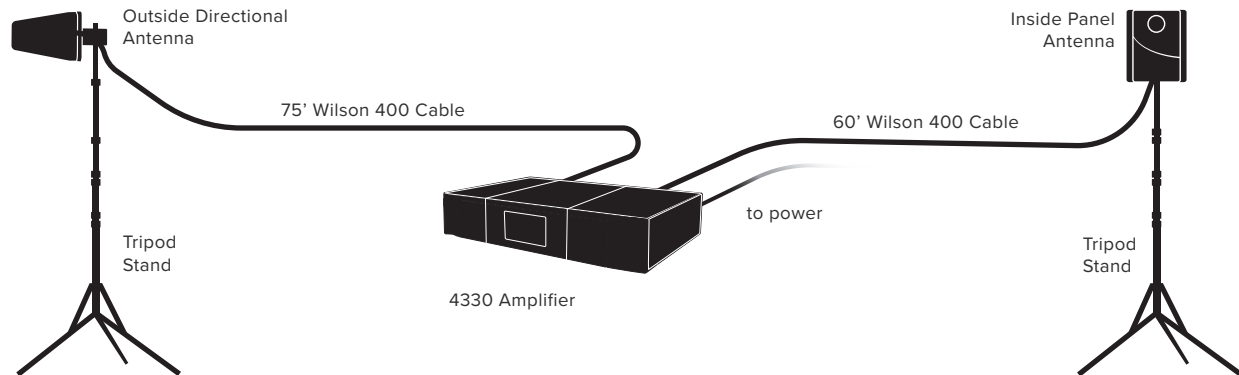

How to install the Mobile Kit

1. Mount outside antenna and inside antenna to their tripods using the included mounting hardware and place in desired locations. Ensure that there is significant isolation between the donor and serving antenna to avoid the BDA from going into oscillation.
2. Uncoil cable and connect the 75' length to outside antenna and 60' length to inside antenna.
3. Plug in the Enterprise 4330 amplifier and turn it on.
4. Use the built in signal meter to ensure that the donor Antenna is optimally placed to receive signal from the nearest Cell site(s). Encourage others to use their phones to further test the improved signal.

Package Dimensions

32 L x 24 H x 16 W



FRONT



SIDE



TOP/ BOTTOM



WEIGHT

MASTER CARTON: None

FOR PARTNER'S USE

Support



3 YEAR WARRANTY FROM PURCHASE

US Web: wilsonconnectivity.com

US Phone: +1 800 871 1612

UPC

