


WEBOOST SXS

SKU: 4709061 MSRP: \$599.99

FEATURES

- The first cell signal booster built for serious off-road work and play — from the ranch to the dunes, the job site to the trail.
- Compatible with all major Side-by-Sides (SXS) and UTVs including Polaris, Can-Am, Kawasaki, Honda, and Yamaha.
- Boosts signal up to 32X, reaches 3X farther from towers, and reduces dropped calls by up to 90%.
- Weatherproof booster enclosure protects from dust, water, and harsh conditions.
- Roll cage clamp with quick release for antenna mounting fits 1.75"–2" bars for secure installation and tool-free removal.
- 5G compatible with all US carriers and supports multiple devices and users simultaneously.

KIT INCLUDES

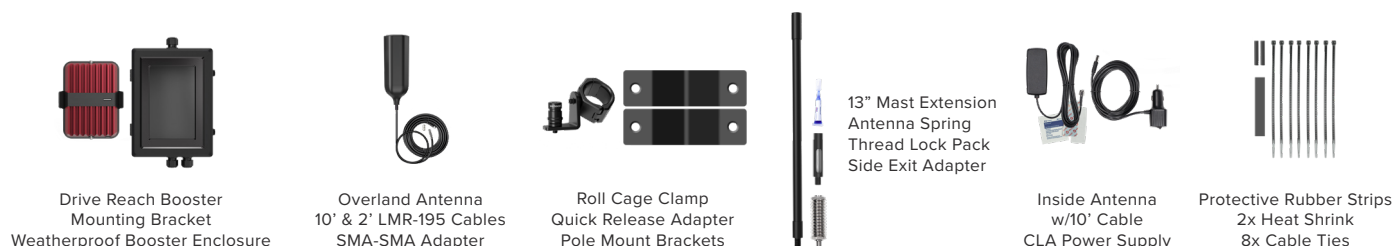

ABOUT

weBoost SXS is the first cell signal booster built for all side-by-sides (SXS) and UTV vehicles. The kit pairs our most powerful in-vehicle booster, the Drive Reach, with a weatherproof enclosure and antenna roll cage clamp designed for the demands of off-road work and play.

The weatherproof booster enclosure protects the booster from dust, water, and harsh conditions. Multiple built-in mounting points secure it to the roll cage, under the seat, or in the cargo bed. The roll cage clamp fits 1.75"–2" bars and features a quick release so the antenna detaches in seconds. Also compatible with existing whip light mounts and standard 3/8-24 threaded antenna springs.

weBoost SXS enhances cellular signals up to 32x, reaching 3x farther from towers with up to 90% fewer dropped calls. It's 5G compatible, works with all US carriers, and supports multiple devices and users at the same time.


The weBoost SXS booster comes with a 2-year warranty.

SPECIFICATIONS

MODEL NUMBER	460061†	
FREQUENCIES	Band 12/17	700 MHz
	Band 13	700 MHz
	Band 5	850 MHz
	Band 4	1700/2100 MHz
	Band 25/2	1900 MHz
MAX GAIN	50 dB	
IMPEDANCE	50 Ohm	
POWER	12V 1.8A	
CONNECTORS	SMA Female	
BOOSTER DIMENSIONS	6 × 4.5 × 1.5 in.	
BOOSTER WEIGHT	1.8 lbs	

† **⚠️ WARNING:** This product can expose you to chemicals including Nickel, which is known to the State of California to cause cancer, and Bisphenol A, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

INSTALLATION

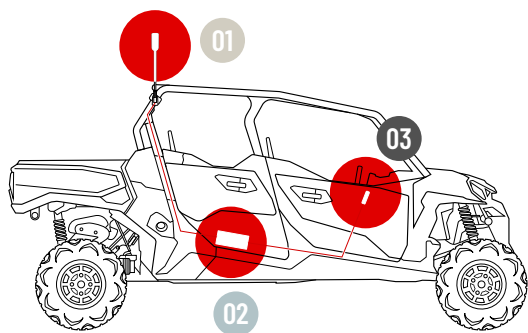

- 01 Outside antenna:** The outside antenna communicates back and forth with nearby cell towers.
- 02 Booster & Enclosure:** The booster amplifies any cell signal it receives from the outside antenna. The weatherproof enclosure protects the booster from dust, water, and harsh conditions.
- 03 Inside Antenna:** The inside antenna broadcasts the amplified signal for use throughout the vehicle.

AVAILABLE ACCESSORIES

Buyers can purchase accessories for additional customization.



Rocker Switch Hardwire Kit
(850053)



18-inch Mast Extension
(991129)



18-foot LMR-195 Cable
(952315)

PACKAGE DIMENSIONS


13.5 L x 4 W x 25.75 H



FRONT



SIDE



TOP/BOTTOM



WEIGHT

MASTER CARTON: 26 x 16 x 14 | 40 Lbs. | QTY 4

FOR PARTNER'S USE

SUPPORT



2-Year Warranty from Purchase.

Website: <http://support.weboost.com>

Phone: +1 866 294 1660
Monday to Friday



PROUDLY DESIGNED AND BUILT
IN ST. GEORGE, UTAH
U.S.A

UPC

